





3. DIMENSIONI E NORMALIZZATI

3.1. Serie JM trifase

B3

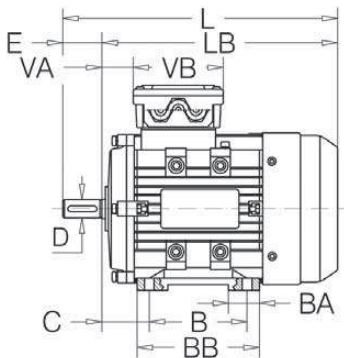


B5






Estremità d'albero
Shaft end

3. DIMENSIONS AND STANDARDIZED

3.1. JM Series three-phase

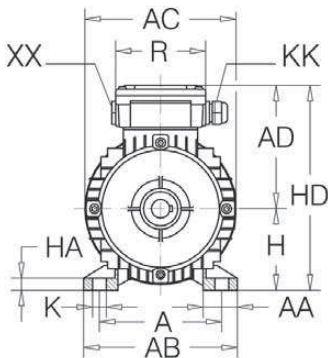

B14



Dis. 3.1 / Draw. 3.1

Tab. 3.1 / Tab. 3.1

Motore Motor JM		Ingombri Principali Main Overall Dimensions						Piedi Feet									Flangia Flange								
		AC	AD	H	HD	LB	L	A	B	C	AB	BB	AA	BA	HA	K	IM	M	N _{j6}	P	LA	T	S		
80	2-4	158	124	80	204	244	284	125	100	50	157	125	35	31	8	10x14	B5	165	130	200	12	3,5	12	N°4	
90	S L	2-4	175	142	90	232	260	310	140	100 125	56	173	125 150	37	32	10	10x14	B14	100	80	120	--	3	M6	N°4
							283	333										B5	165	130	200	12	3,5	12	N°4
90	S L	6	175	145	90	235	270	320	140	100 125	56	173	125 150	37	32	10	10x14	B5	165	130	200	12	3,5	12	N°4
							295	345										B14	115	95	140	--	3	M8	N°4
100	L	2-4 6	198	155 160	100	255 260	310	370	160	140	63	196	172	40	39	11	12x16	B5	215	180	250	13	4	15	N°4
							340	400										B14	130	110	160	--	3,5	M8	N°4
112	M	2-4-6	219	168	112	280	375	435	190	140	70	227	180	41	43	12	12x16	B5	215	180	250	14	4	15	N°4
																		B14	130	110	160	--	3,5	M8	N°4
132	S M M	2-4-6 4 6	258	188	132	320	385	465	216	140			186	51	46	15	12x16	B5	265	230	300	14	4	15	N°4
						423	503			178	89	262	224					B14	165	130	200	-	3,5	M10	N°4
160	M L	2-4-6	316	240	160	400	500	610	254	210	108	304	260	55	50	18	15x18	B5	300	250	350	16	5	19	N°4
							545	655		254			304					B14	215	180	250	--	4	M12	N°4

Tab. 3.2 / Tab. 3.2

Motore Motor		Estremità d'Albero Shaft-End							Tenute sull'albero Shaft-Seals						Scatola - Morsettiera Terminal - Box						
		Linguetta Key							Lato Flangia Flange-end			Lato comando B3 e lato opposto / Drive end DE Non drive end NDE			Morsetti Terminals	Pressacavo Cable gland					
JM		D	DB	E	GA	F	GD	EB	Øi	Øe	H	Øi	Øe	H	N°-Ø	N°-KK	N°-XX	VA	VB	R	
80	2-4	19	M6	40	21,5	6	6	30	20	35	7	18	30	7	6-M4	1-M20x1,5	1-tappo plug	31	87	87	
90	S L 2-4-6	24	M8	50	27	8	7	40	25	40	7	23	33	8	6-M4	1-M25x1,5	1-tappo plug	31	106	106	
100	L 2-4-6	28	M10	60	31	8	7	50	30	47	7	28	43	8	6-M4	1-M25x1,5	1-tappo plug	31	106	106	
112	M 2-4-6	28	M10	60	31	8	7	50	30	47	7	28	43	8	6-M5	2-M25x1,5	--	34	115	122	
132	S M 2-4-6 4-6	38	M12	80	41	10	8	65	40	62	7	38	57	8	6-M5	2-M32x1,5	--	43	115	122	
160	M L 2-4-6	42	M16	110	45	12	8	90	45	62	12	43	55	8	6-M6	2-M40x1,5	1-M16x1,5	83	150	162	