Officine Orobiche	data sheet for level switch series 40	doc. N. **P19/651**
	quantity **3**	pos **1** of **1** rev **0**
	model **41C.MO.MO.2M6.WP.XX**	

	tag	fluid	Density kg/dm3	temp. ℃ min/oper/des	press. barg min/oper/des	switch point mm H/L	H/L
s1		SEA WATER	1,024	./55./55	0./1		
s2		SEA WATER	1,024	./55./55	0./1		
s3		SEA WATER	1,024	./55./55	0./1		
s4							
s5							
s6							
s7							
s8							
s9							
s10							

01	connections pos.	TOP
02	connections type	4"ANSI 150 RF 0
03	.	.

04	body mat.	MONEL	26		
05	attraction sleev	NICKEL	27	label	ALUMINIUM
06	Nipple/Enclus. Tube	MONEL	28	body rating	PN6
07	antisteam	NO	29	hydraulic test (bar)	9
08	internal parts	MONEL	30	.	.
09	spring	MONEL	31	.	.
10	rope	MONEL L=7m	32	form	Fig.2
11	.	.	33	dim. drawing	
12	float	MONEL	34		
13	.	n°2 Ø94x180mm	35		
14	.	.	36		
15	nace	no	37		
16	paint	.	38		
17	.	.	39		

18	housing	ALUMINIUM WP IP 66
19		
20	fins	.
21	switch groups	n°2 M6 (GOLD PLATED) DPDT (48VDC 0,5 A) RES .
22	electric connection	3/4" NPTF /// .
23	amb. Temp. min/max	-10 / 45℃
24	PED 2014/68/UE	Not Applicable
25	AREA	.
v1		
v2		
v3		
v4		
v5		
n1	AS OUR F.53280.1	
n2	(ex F.90717)	
n3		
n4		
n5		

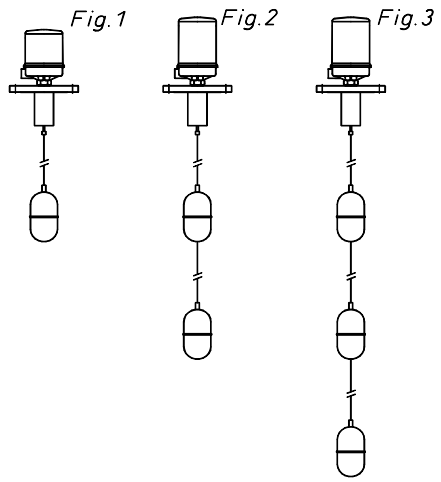

issued UV.....date

dic-18