

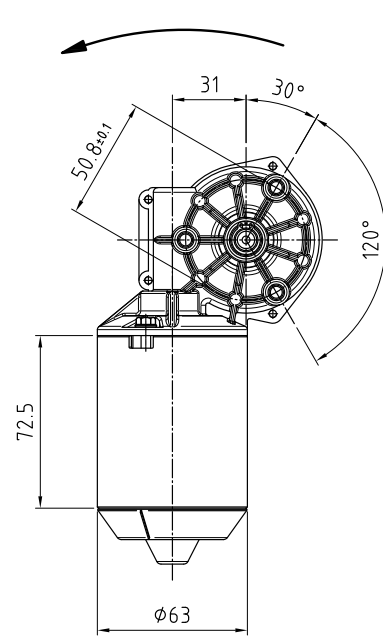


Preferred drive direction

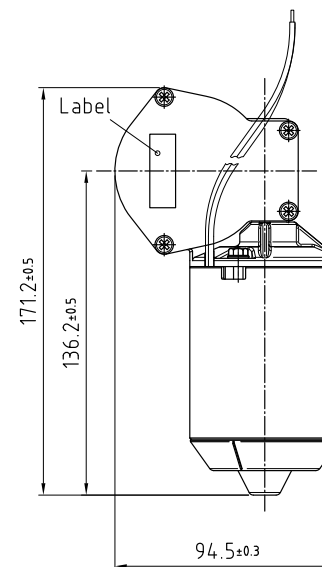

Connection leads
Red = +
Blue = -
Length = 300 ± 10

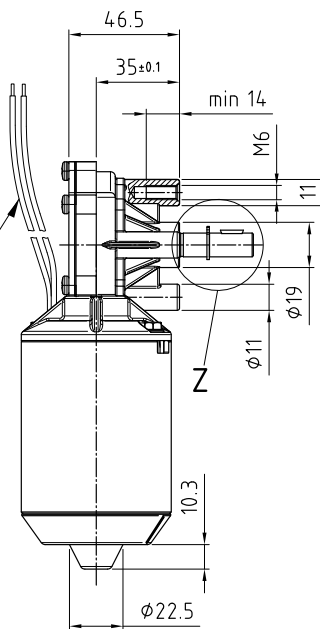



Code	100.686 / FC
Nominal tension	24 V DC
Nominal torque	2.5 Nm
Nominal power	30 W
No load speed	140 min ⁻¹
Starting torque	26 Nm
Protection class	IP 30
Insulation class	F
Weight	~1.1 Kg

Attention: not drawn to scale!



Seeger-Ring for shaft DIN 471

Woodruff key DIN 6888

Z Scale 1:1

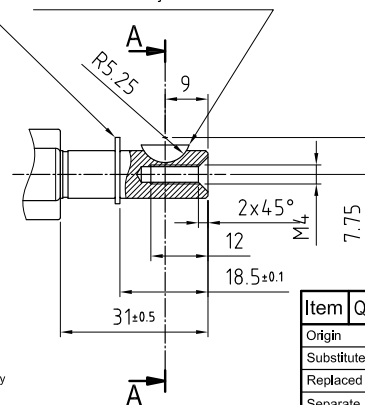

A-A Scale 1:1

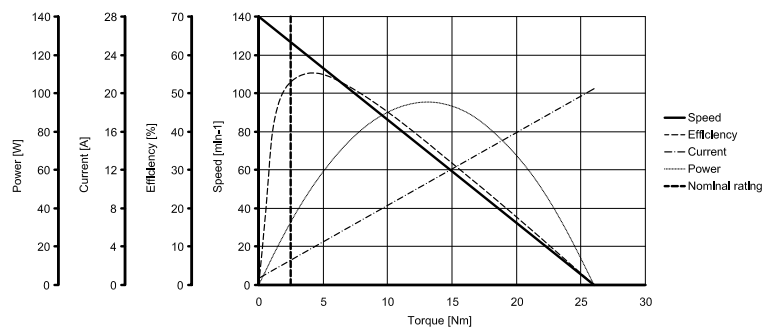

Item	Quantity	Description	Material	Remarks
Origin			Established	Scale
Substitute of			Approved	
Replaced by			Amendment	
Separate part list				
For this document and the therein represented items we reserve all rights. Without our explicit consent the reproduction, the disclosure to third party or the utilisation of its content is prohibited. © Copyright by Angst + Pfister 2014				Division
				Format A3
				Number of sheets 1
				Sheet 1
				CAD

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich

Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim

Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
Brecksville, OH 44141

Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts

