



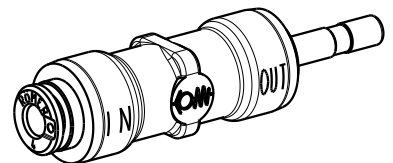

Push-in connector
for hose OD 4

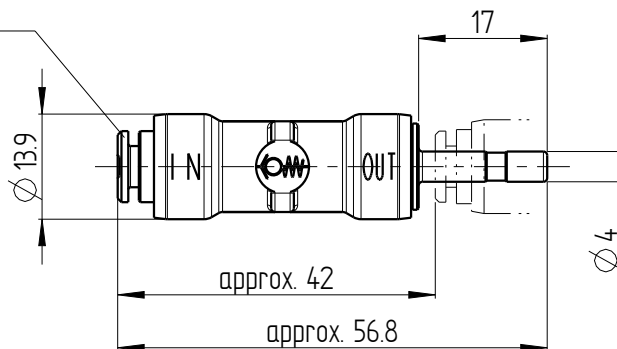

CHARACTERISTICS

General

Constructional design Spring-loaded cone non-return valve

Product name Non-return valve

Product type VRN-947-P325-4FF-D4

Nominal diameter DN 2.5

Ambient temperature 0 °C up to +60 °C

Medium temperature 0 °C up to +140 °C

Material
Body: PPSU nature
Other internal parts: 1.4404; PPSU nature; 1.4310
Seal material: FKM
Release ring: PPSU nature
Retaining ring: 1.4404
Weight: 11.03 g Grip ring: 1.4310

Pneumatic - hydraulic

Nominal pressure PN 16

Operating pressure 0.1 up to 16 bar

Opening pressure 0.1 bar

Kv-value water 0.15 m³/h

Medium Gases or liquids which do not corrode the materials specified

Caution! PPSU should not be used in contact with aromatic hydrocarbons, oxidising acids, acetone, chlorinated hydrocarbons, ethers or ketones! Also, PPSU should not be placed directly in contact with anaerobic adhesives!



2025	Date	Name
Drawn	31.03.	J.Wenzel
Checked	31.03.	W.Haselwarter

Scale
1:1

Description:

VRN-947-P325-4FF-D4
Non-return valve

Order-number: 634925



634925-01D