

INDOOR VOLTAGE TRANSFORMER



STANDARD : IEC - ANSI - CSA

INSULATION LEVEL : up to 24/50/125kV

1 H.V. Bushing

TYPE : Y24G2


WITH SEALABLE COVER

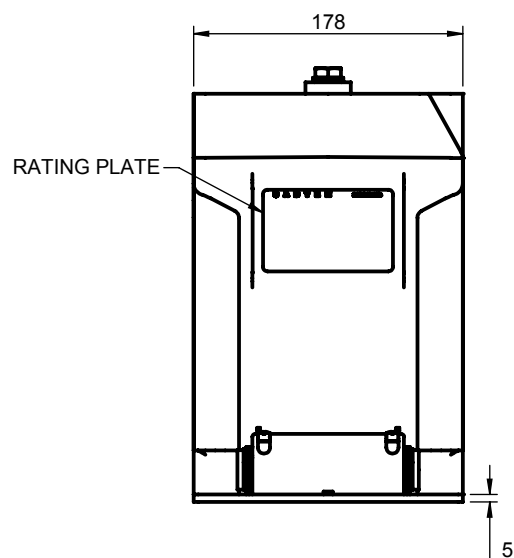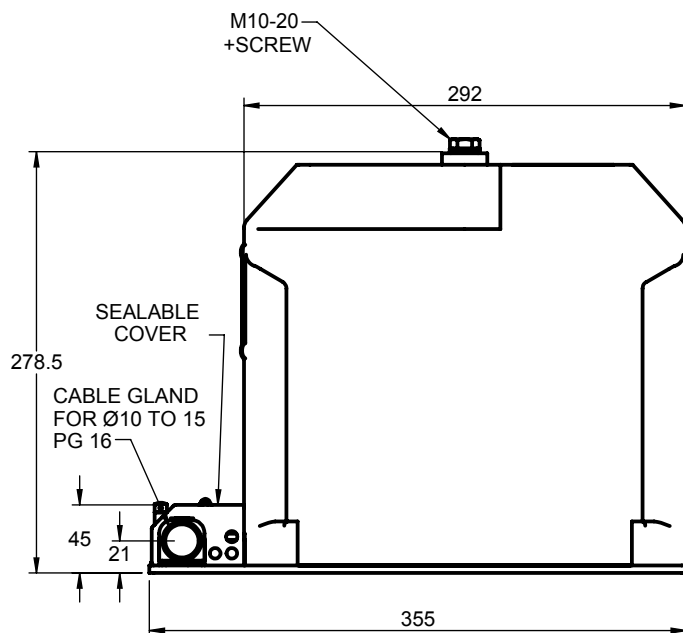

SECONDARY TERMINALS



a1 X1	a2 X2	n X3	da Y1	dn Y2	N H2	IEC ANSI-CSA
1a X1	1n X2	2a Y1	2n Y2	N H2		
a X1	n X2	da Y1	dn Y2	N H2		
a1 X1	a2 X2		n X3	N H2		
a X1			n X2	N H2		

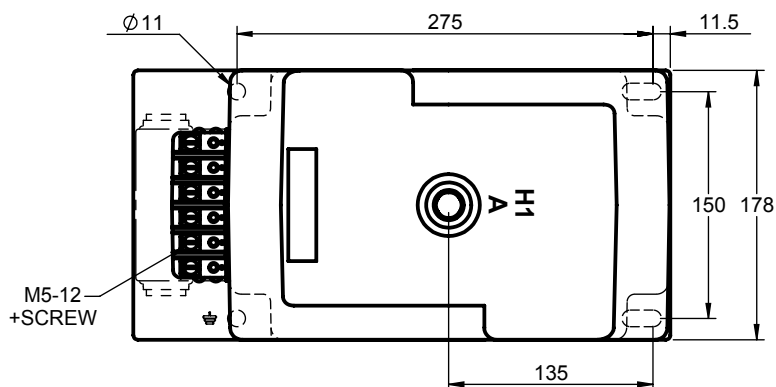

RATED TIGHTENING TORQUE (±5%)

Primary terminals (M10) : 30 N.m
Secondary terminals (M5) : 5 N.m

Approx. Weight : 35 Kg

This document is the property of SADTEM and may be changed without prior notice

Créat. : 30.09.2008

Rév. : 19.02.2016

SADTEM

BP 655
59506 DOUAI CEDEX
FRANCE

INSTRUMENT TRANSFORMERS

D

N°2-40747