


RATED DATA

Motor type	T8-0680-30-560	
Winding number	01-00398	
Rated Speed	n_n	3000 min ⁻¹
DC Bus Voltage	U_{dc}	560 V
Nominal AC Voltage	U_n	330 V
Rated Motor Voltage	U_m	321 V
Rated Power	P_n	15,71 kW
Rated Torque	M_n	50 Nm
Rated AC Current	I_n	31,08 A
Stall Torque	M_o	68 Nm
Stall AC Current	I_o	39,9 A
Peak Torque	M_{max}	204 Nm
Peak Current	I_{max}	155,7 A
Max. Speed	n_{max}	3600 min ⁻¹
EMF Constant	K_E	103 V/1000
Torque Constant	K_T	1,7 Nm/A
Terminal Resistance	R_{2ph}	0,1 Ω
Terminal Inductance	L_{2ph}	2,5 mH
Number of poles	2p	6
No Load Speed	n_o	3200 min ⁻¹
Torque at I_{max}/U_n	M_z	201,1 Nm
Speed at I_{max}/U_n	n_z	1970 min ⁻¹
Max. Torque at n_n	M_x	69,27 Nm
El. Time Constant	T_{el}	25 ms
Mech. Time Constant	T_{mech}	0,68 ms
Thermal Time Constant	T_{th}	65 min
Rotor Inertia	J_r	113,60 kgcm ²
Brake Inertia	J_b	56 kgcm ²
Braking Torque	M_b	145,00 Nm
Mass motor *	m_m	56,00 kg
Mass motor incl. brake *	m_{mb}	65,50 kg

Torque/speed curves

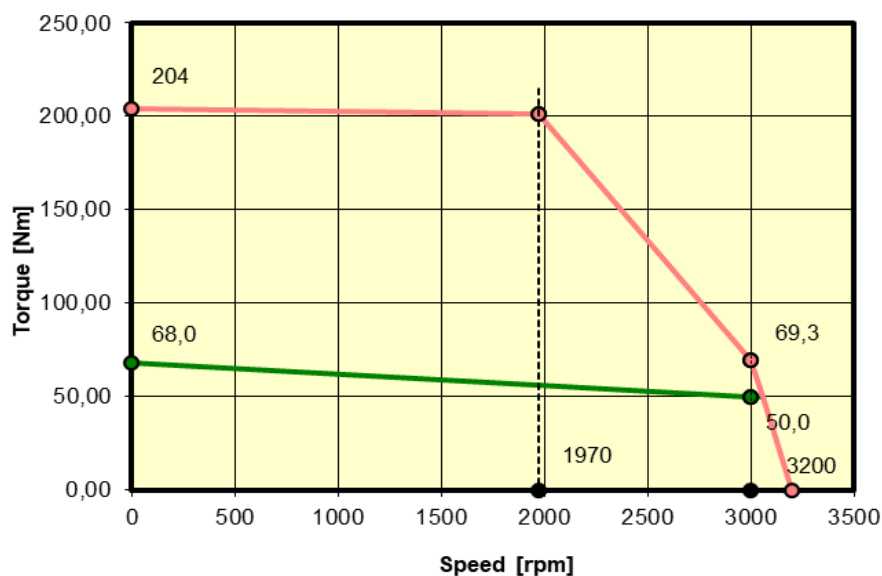

* standard - resolver feedback and straight connectors

14.07.2017