


COMBINED SPEED CONTROLLER



INDICAITION OF SPEED CONTROLLER

UX	315	-	0	2
MODEL	OUTPUT	TYPE		VOLTAGE
UX: Digital display speed controller	206 : 6W	0 : Induction 1 : Reversible		1 : 1ø110V (60Hz)
	315 : 15W			2 : 1ø220V (60Hz)
	425 : 25W			2E : 1ø220~240V (50Hz)
	540 : 40W			10 : 1ø100V (60Hz)
	560 : 60W			10E : 1ø100V (50Hz)
	590 : 90W			20 : 1ø200V (60Hz)
	5120 : 120W			20E : 1ø200V (50Hz)
	5150 : 150W			

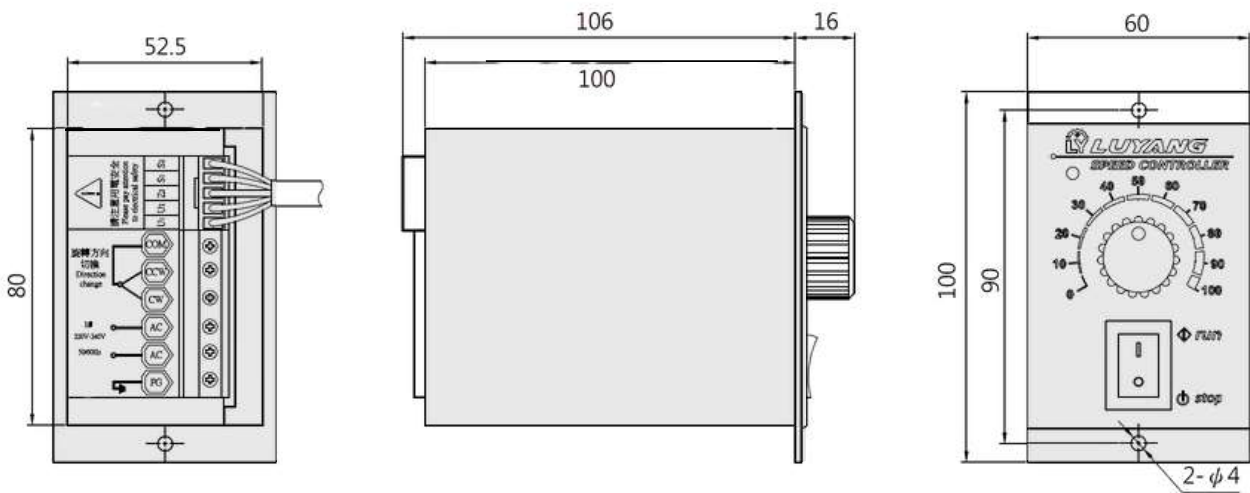

SPECIFICATION

Type	Voltage (V)	Frequency (Hz)	Rated current (A)	Output (W)	Speed range (rpm)	Speed rate of change (%)	Velocity reaction	Electronic brake	Velocity safety	Ambient condition
UX01	100~110V	60	5	6-150	90~1600	5%	0.5 (Sec)	--	☉	-10°C~+50°C
UX02	200~220V									
UX02E	200~240V	50	5	6-150	90~1350	5%	0.5 (Sec)	--	☉	-10°C~+50°C