


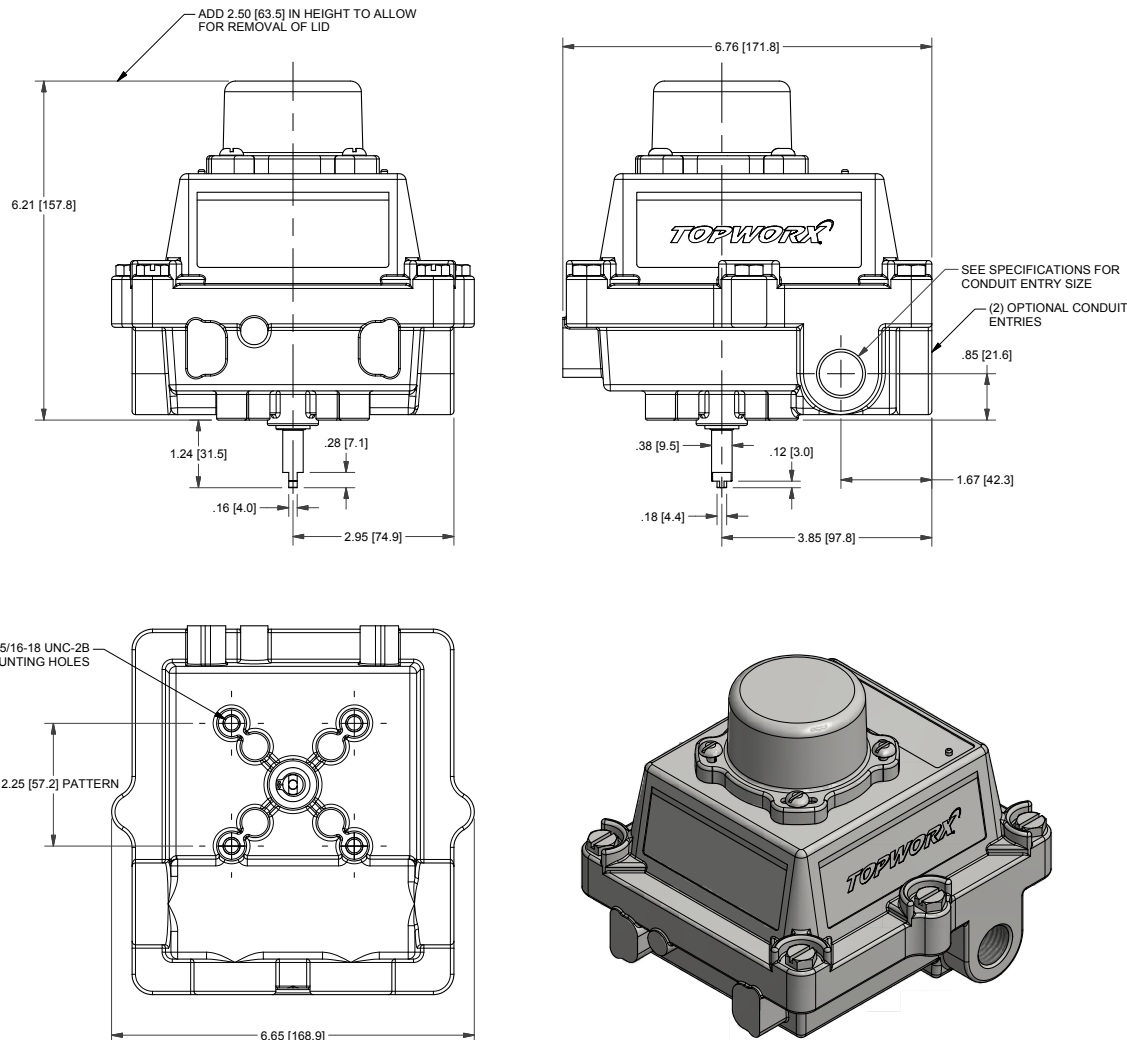

MODEL NUMBER

DXP-E20GNMB


PRODUCT LINE

Switchbox DXP and DXS

SPECIFICATIONS


Enclosure	Tropicalized aluminum
Bus/Sensor	(2) P+F NJ2-V3-N inductive NAMUR
Area Classification	Intrinsically safe
Visual Display	Standard 90° Green OPEN, Red CLOSED
Shaft	NAMUR 316 stainless steel
Conduit Entries	(2) M20
O-Rings	Buna-N
Pilot	No pilot device(s)
Spool Valve	No spool valve
Valve Cv	No valve Cv
Manual Override	No manual override
Regional Certification	No regional certification
N Switch	No N Switch

WIRING DIAGRAM

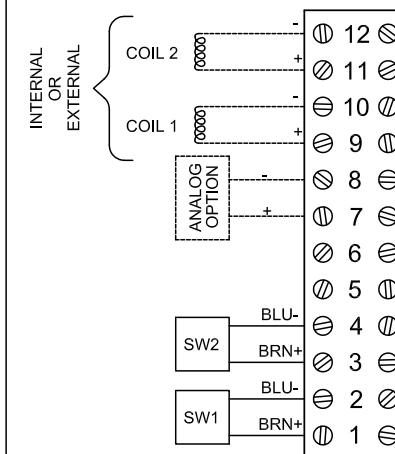

Current as of August 13, 2018 – Subject to change without notice.

NAMEPLATE



CI I Div 1, Grps A-D;
Type 4X; T4 -50°C ≤ Ta ≤ 60°C
Ex ia IIC T6/T4 Gb; -60°C ≤ Ta ≤ 70°C/81°C
IP66/67
Intrinsically Safe - Exia / Sécurité Intrinsèque
Install per Control Drawing S-K136


Model #:

Telemetering Equipment for use In Hazardous Locations
WARNING: Substitution of components may impair intrinsic safety. The installer shall confirm which certified sub-assemblies are fitted and ensure compliance with the entity parameters in the appropriate certificate. Potential electrostatic charging hazard - Clean only with damp cloth.

AVERTISSEMENT: La substitution de composants peut compromettre la sécurité intrinsèque.

TopWorx
3300 Fern Valley Road
Louisville, KY 40213 USA
www.topworx.com

Serial #:



TOPWORX

3300 Fern Valley Road
Louisville, KY 40213

(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com