


Click on the model to enable interactive CAD functions

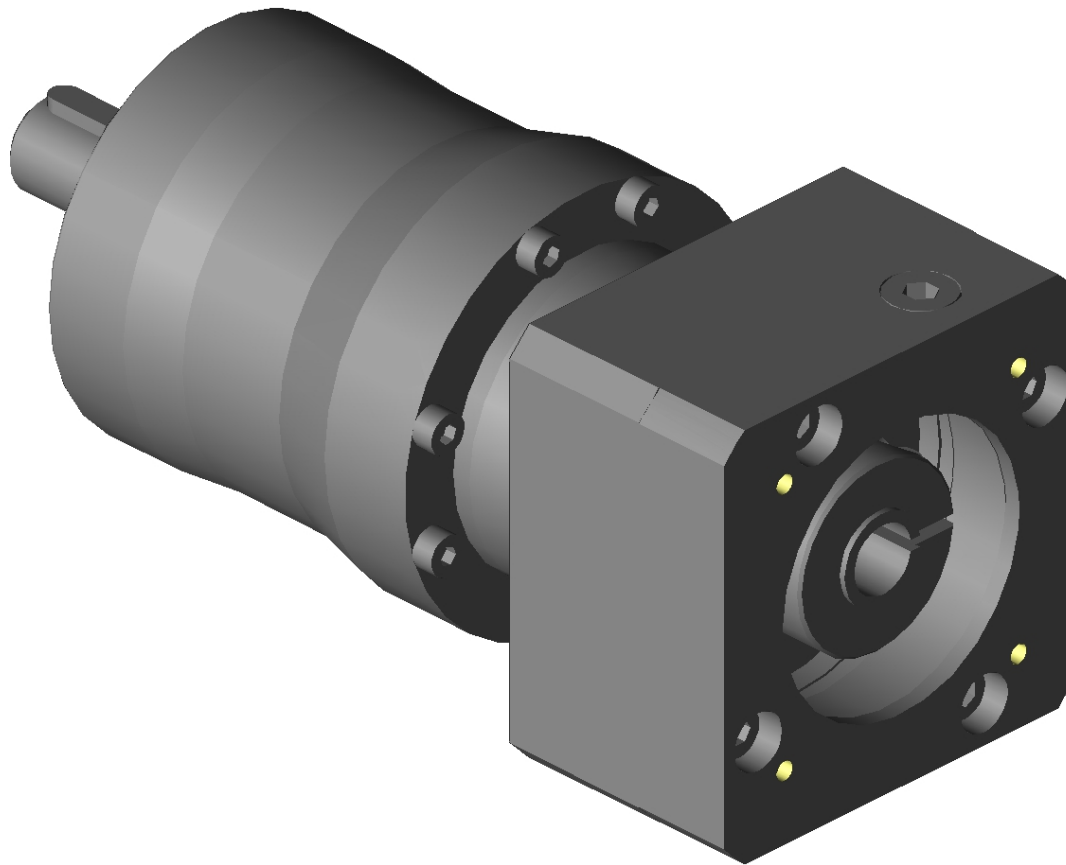

Your Configuration

PE322MEL

Gearbox configuration

Rack and pinion drive type	Without
Shaft design	Solid shaft with feather key
Shaft dimension	Diam. 16x28 P
Housing design	Pilot 52 / bolt circle 62 / M5
Mounting position (arrow side = gearbox bottom side)	Any


Input configuration

Input shaft seal ring	Standard
Motor connection	Sqr. 75 / pilot 50 / bolt circle 70 / M4 / c=18
Motor shaft diameter	Diam. 12 without feather key
Access locking screw	270 deg.

We reserve the right to dimensional changes in the interest of technical progress!

Input Shaft
VIEW

Output Shaft
VIEW

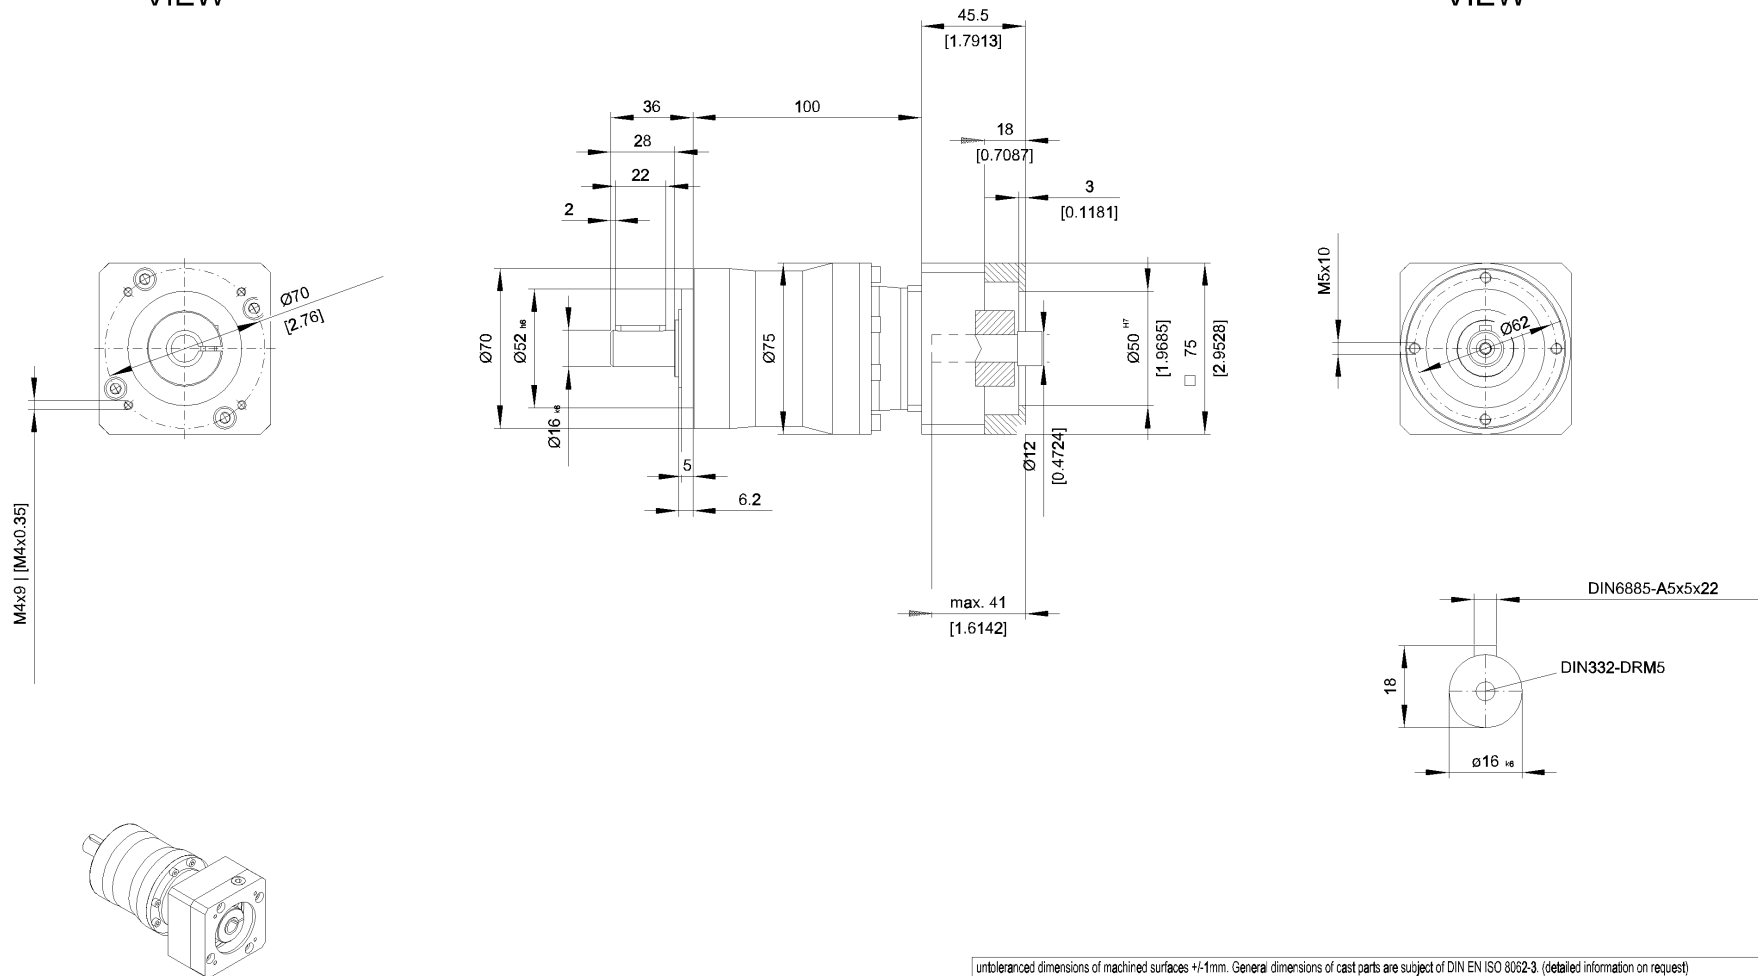

untoleranced dimensions of machined surfaces ± 0.1 mm. General dimensions of cast parts are subject of DIN EN ISO 8062-3. (detailed information on request)

date	28/07/2025	scale	1:1.96	unit	mm [inch]	format	A3		STÖBER ANTRIEBSTECHNIK
no.	PE322MEL	Kloppstr. 12 • 75177 FROBENHOFEN • GERMANY Tel. +49 7231 982-0 • Fax +49 7231 982-1000 eMail: mail@stoer.ch • www.stoer.ch							

This document has been produced electronically. All information is binding only after confirmation by the manufacturer. Subject to dimensional changes in the interests of technical development! No automatic exchange of the drawing by dimensional changes!