

Technical drawing of a gear profile with the following dimensions:

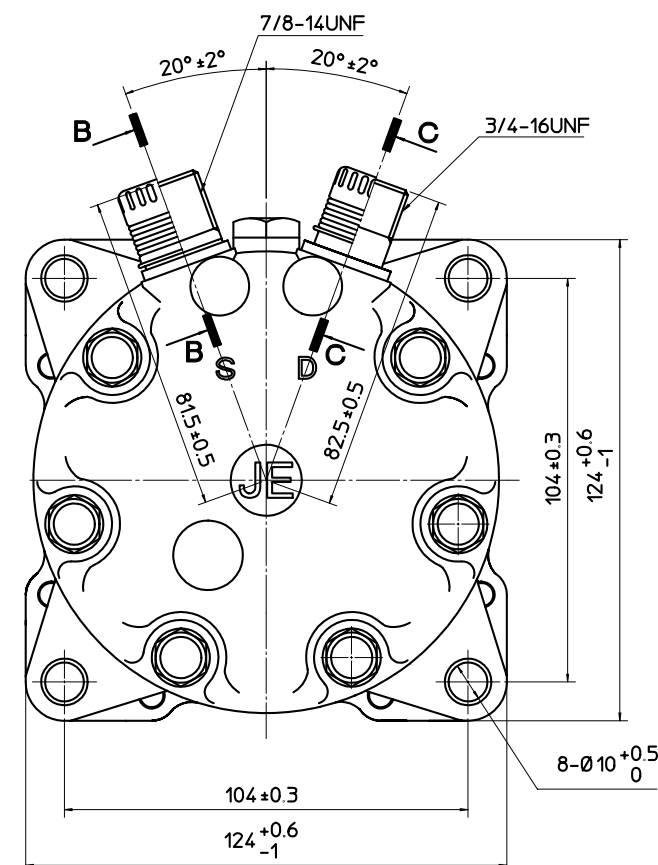
- Overall width: 24.92 ± 0.1
- Pressure angle: $40^\circ \pm 0^\circ 30'$
- Top fillet radius: $R0.25 \begin{smallmatrix} +0.15 \\ 0 \end{smallmatrix}$
- Bottom fillet radius: $R0.5 \begin{smallmatrix} 0 \\ -0.25 \end{smallmatrix}$
- Keyway width: 3.56 ± 0.05

Technical drawing of a mechanical part with the following dimensions and tolerances:

- Top diameter: $\varnothing 16.4 \pm 0.09$
- Bottom diameter: $\varnothing 14.55 \begin{smallmatrix} +0.1 \\ 0 \end{smallmatrix}$
- Top radius: $R1.5 \pm 0.1$
- Bottom radius: $R1.5 \pm 0.4$
- Angle: $5^\circ \pm 1^\circ$
- Angle: $20^\circ \pm 1^\circ$
- Reference: REF

Technical drawing of a mechanical part with the following dimensions:

- Top diameter: $\varnothing 13.7 \pm 0.09$
- Inner diameter: $\varnothing 11.8 \pm 0.05$
- Top chamfer angle: $5^\circ \pm 7^\circ$
- Top chamfer width: 3.4 ± 0.1
- Bottom chamfer angle: $20^\circ \pm 7^\circ$
- Bottom chamfer width: 11.5 ± 0.4
- Reference length: 12 REF

[illegible]

BORE	Ø29.3 mm
STROKE	32.8 mm
DISPLACEMENT PER REVOLUTION	154.9 cc/rev
NUMBER OF CYLINDERS	7
MAXIMUM ALLOWABLE r.p.m.	7000 r.p.m.
MAXIMUM ALLOWABLE CONTINUOUS r.p.m.	6000 r.p.m.
REFRIGERANT	HFC134a
OIL(SP-10 OR EQUIV.)	135 cc
ROTATION(CLUTCH SIDE VIEW)	CLOCKWISE
WEIGHT	kg

RATED VOLTAGE	DC 12 V
BREAKAWAY TORQUE	3.5 kg-m
MINIMUM ENGAGEMENT VOLTAGE	7.5 V max
POWER CONSUMPTION	43 W (Cu)
MAXIMUM ALLOWABLE r.p.m.	7000 r.p.m.
MAXIMUM ALLOWABLE CONTINUOUS r.p.m.	6000 r.p.m.
BELT TYPE	PV
PULLEY DIAMETER	Ø119 mm
WEIGHT	kg



△			..	MATERIAL	PART NO. 8230	NAME COMPRESSOR
△			..	THIRD ANGLE PROJECTION	SCALE 1:1	
△			..	DESIGN BY 邵顺发 20.05.2005 Raymond	CHECKED BY 高橋正 20.05.2005 Masa.T	MODEL SD7H15JE8230
△			..			DRAWING NO. 8230-6000S
No.	REVISION RECORD	BY	DATE			